

Dear Customer


Very important Please Note:





Your new cabinet has an Infra-red sensor on the bottom of the rear carcass.


There needs to be at least a 20cm gap between the head of the sensor and the nearest obstacle, a wall for example.

If the gap is less than 20cm then your sensor will not work properly!

IMPORTANT
CABINET LOCATION




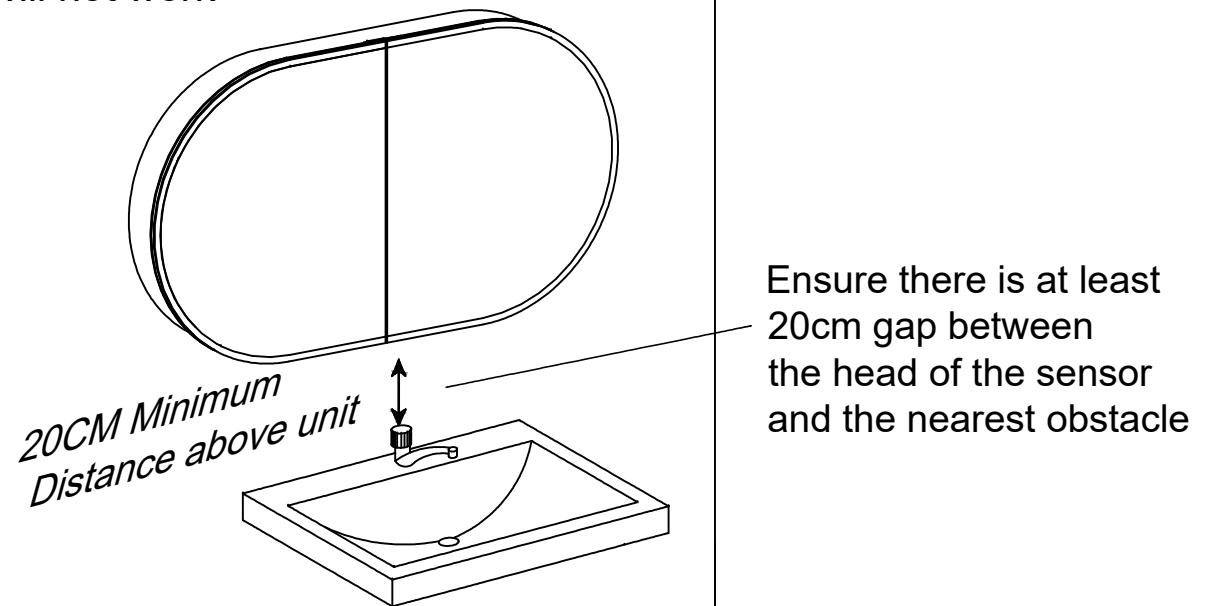


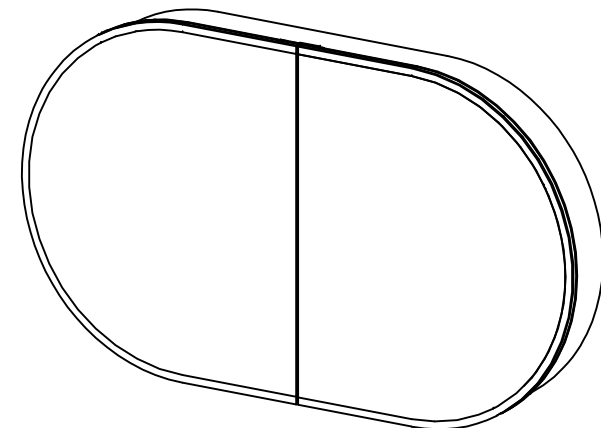
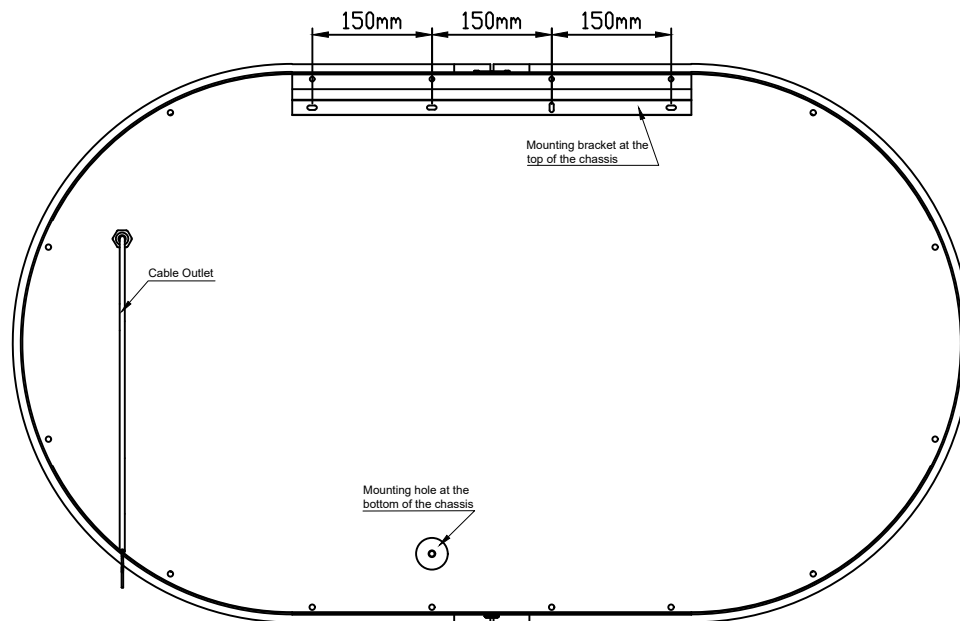
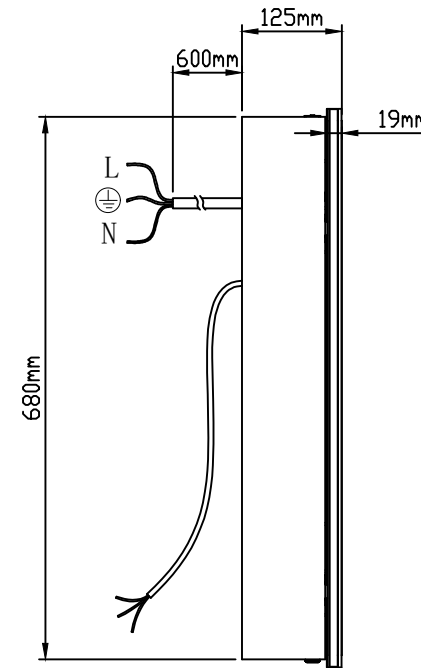
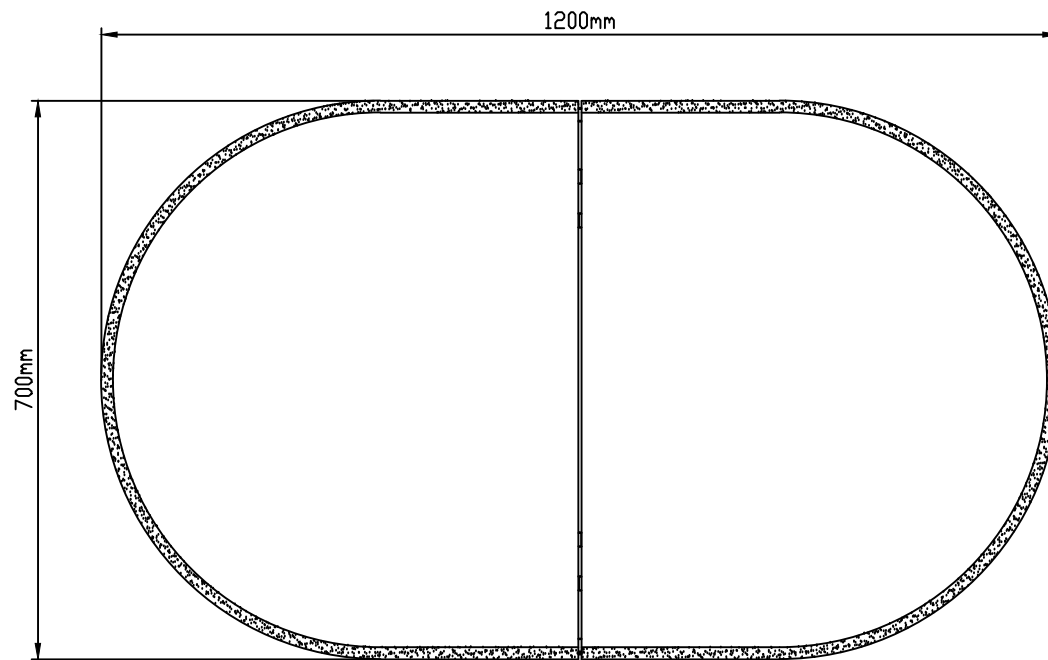


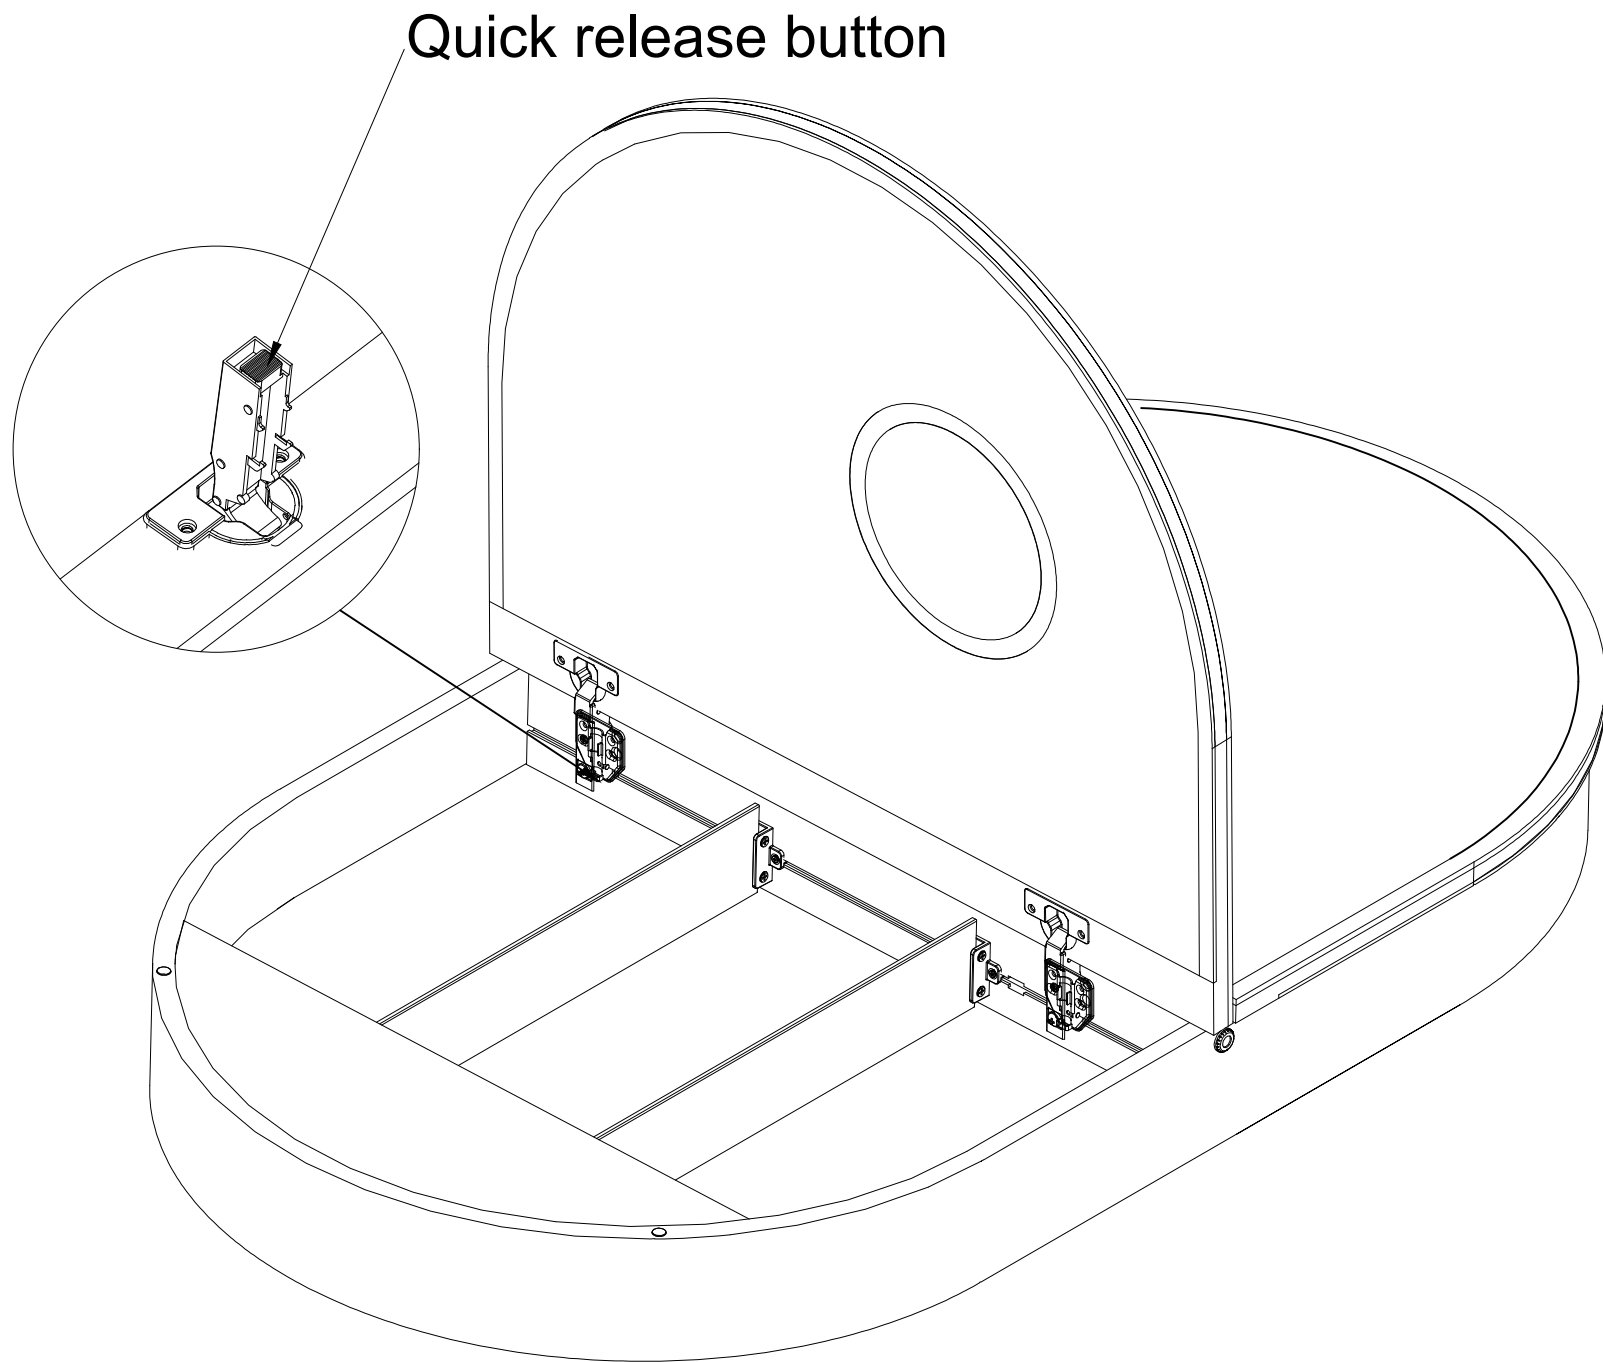





Remove the mirror door and lay it flat on a soft surface, otherwise it will damage the mirror.
Press the quick release button on the hinge to release the hinge. Please do not loosen the hinges from the mirror door.

INSTALLATION INSTRUCTIONS

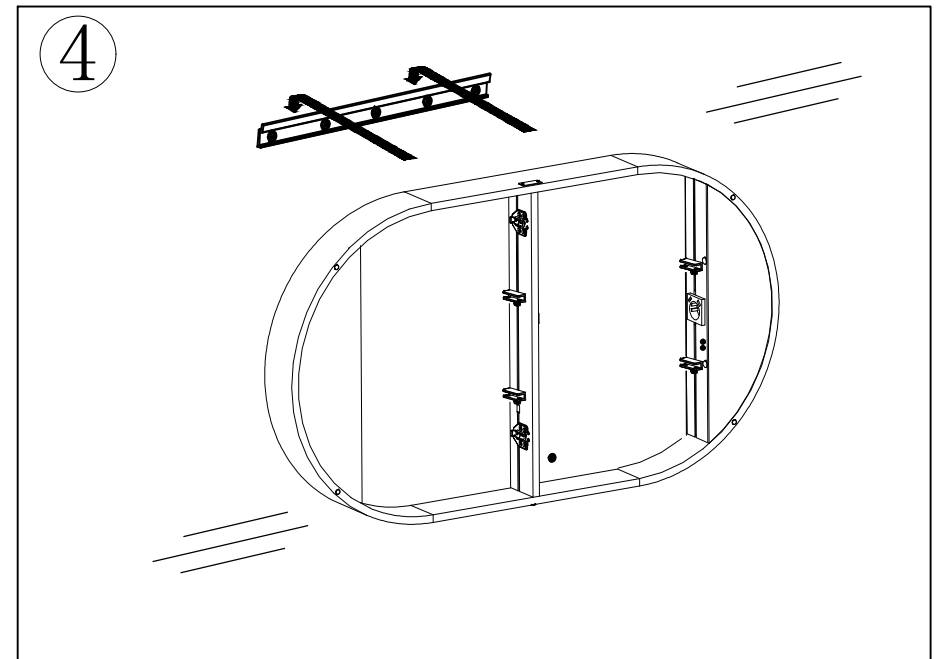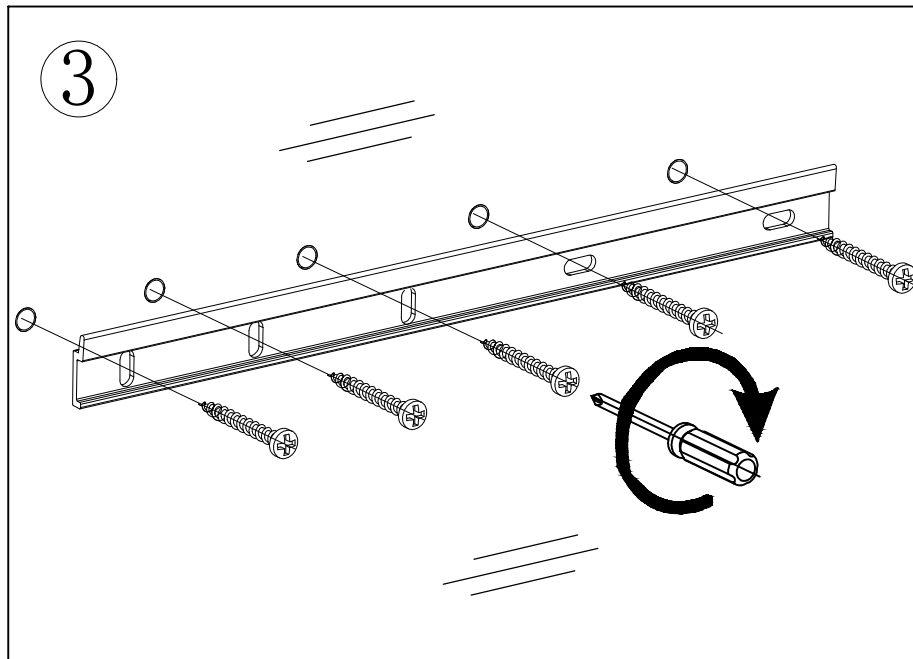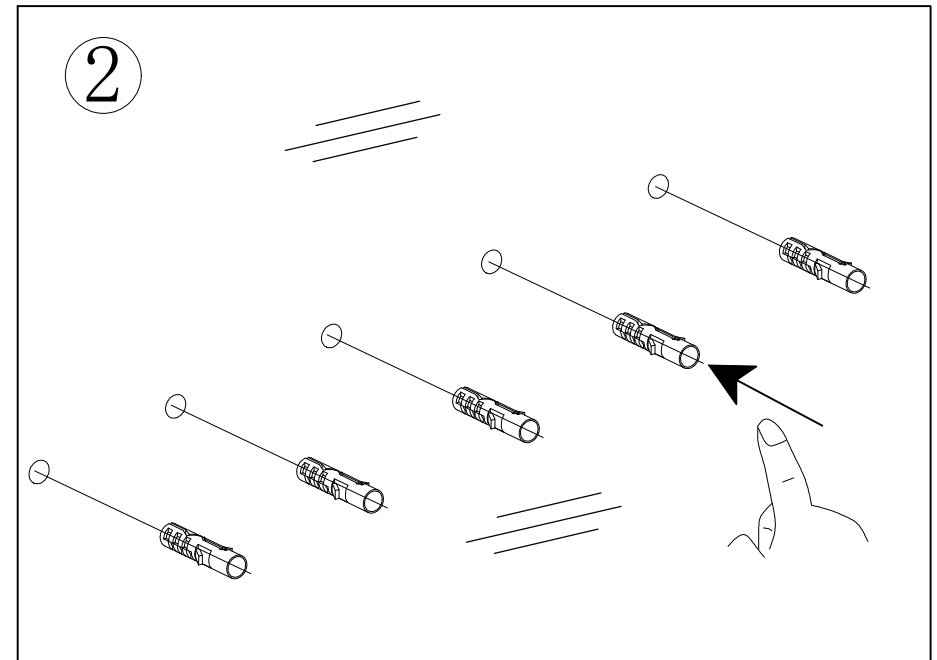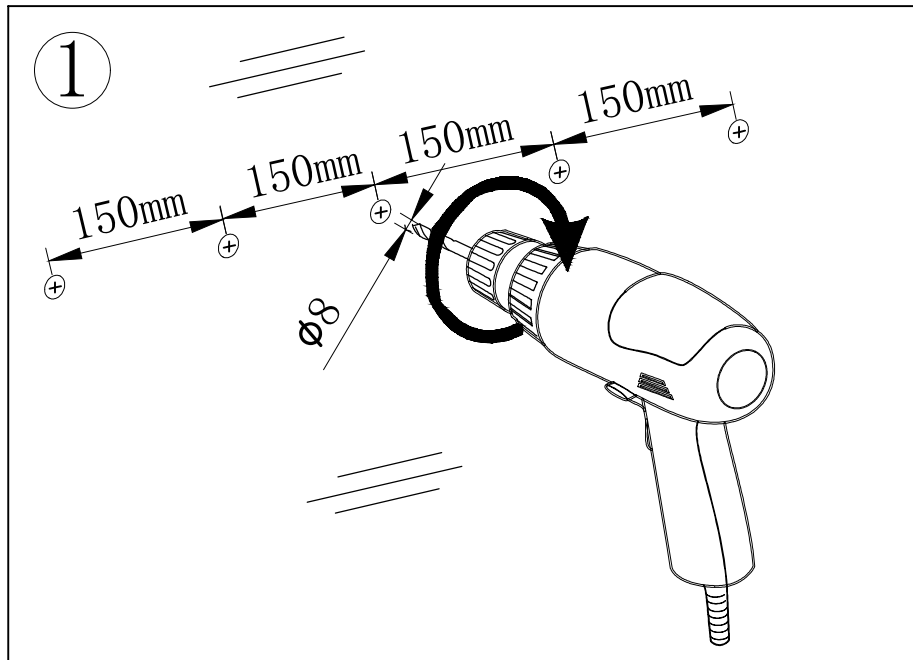

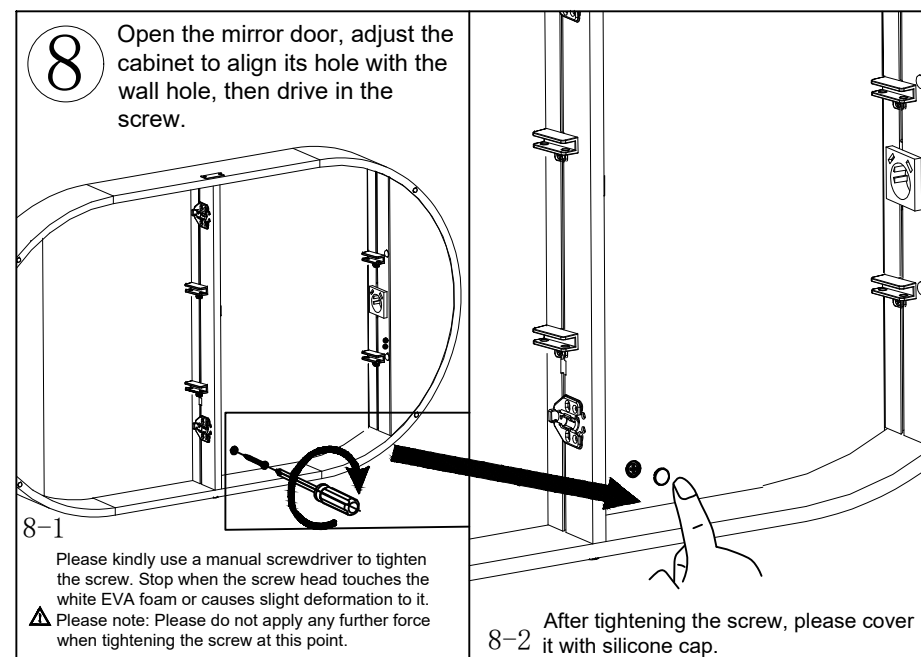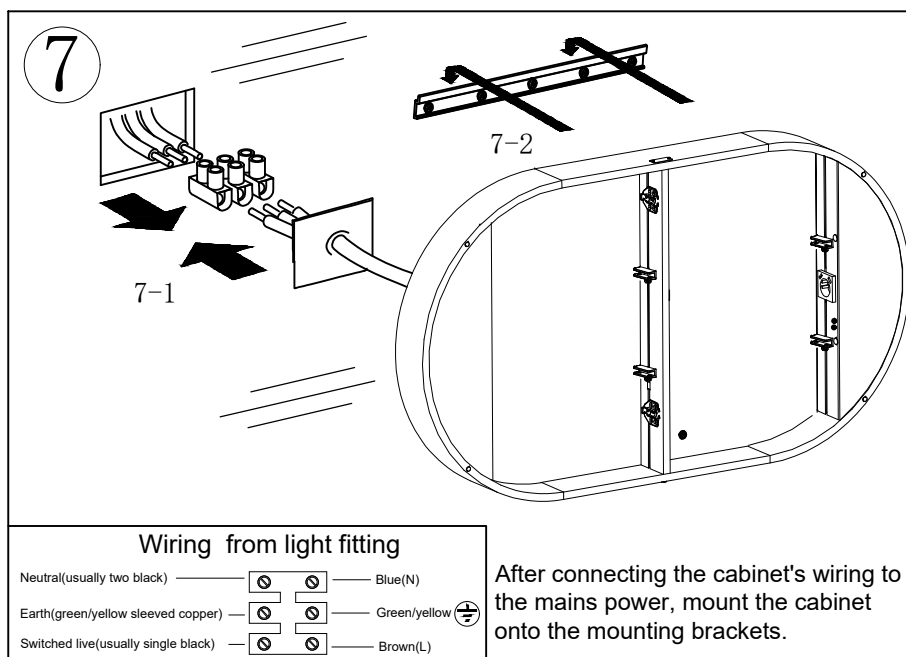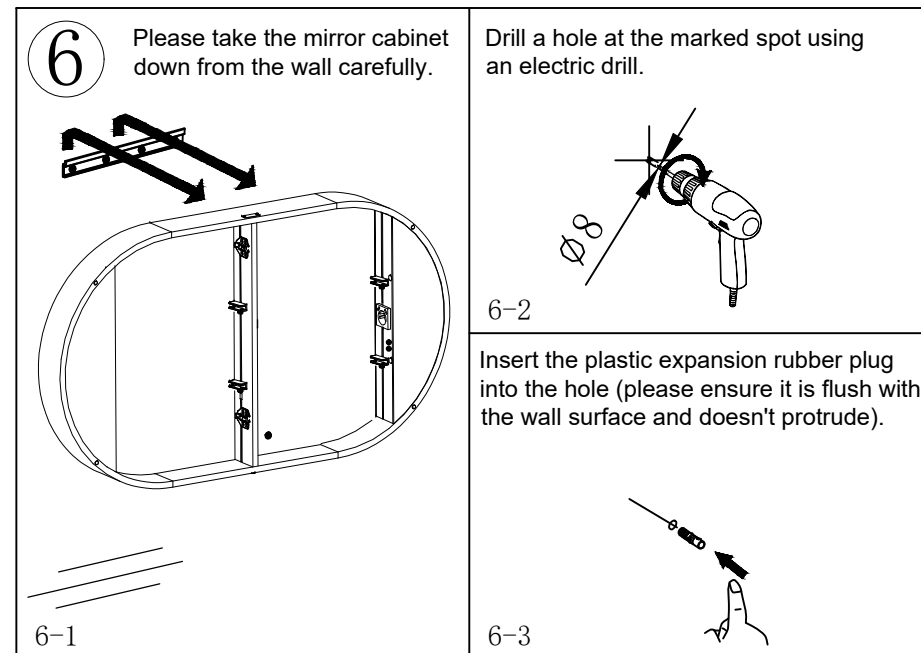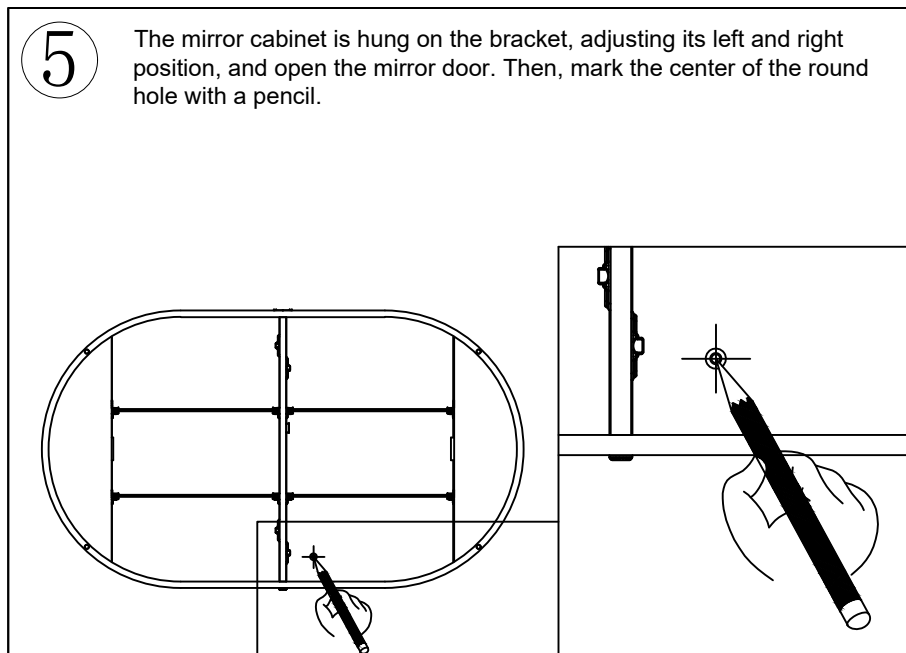


FIXING INSTRUCTIONS FOR THE ADJUSTABLE GLASS SHELVES

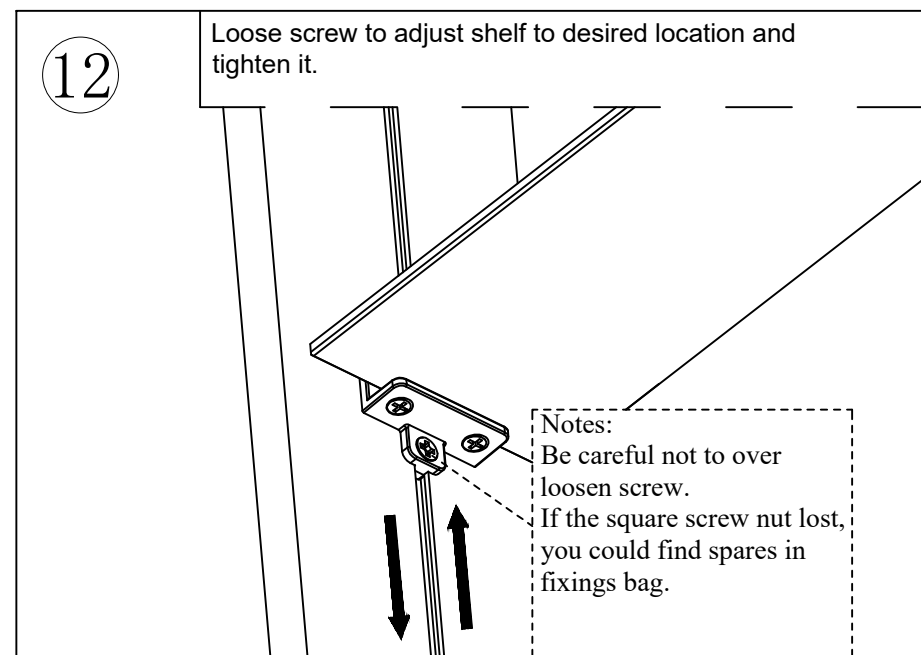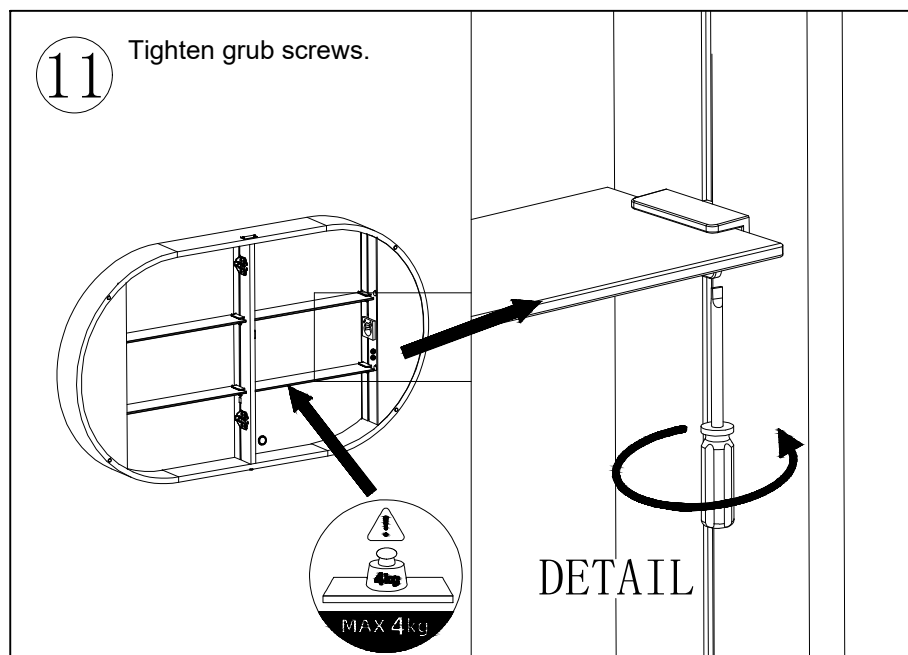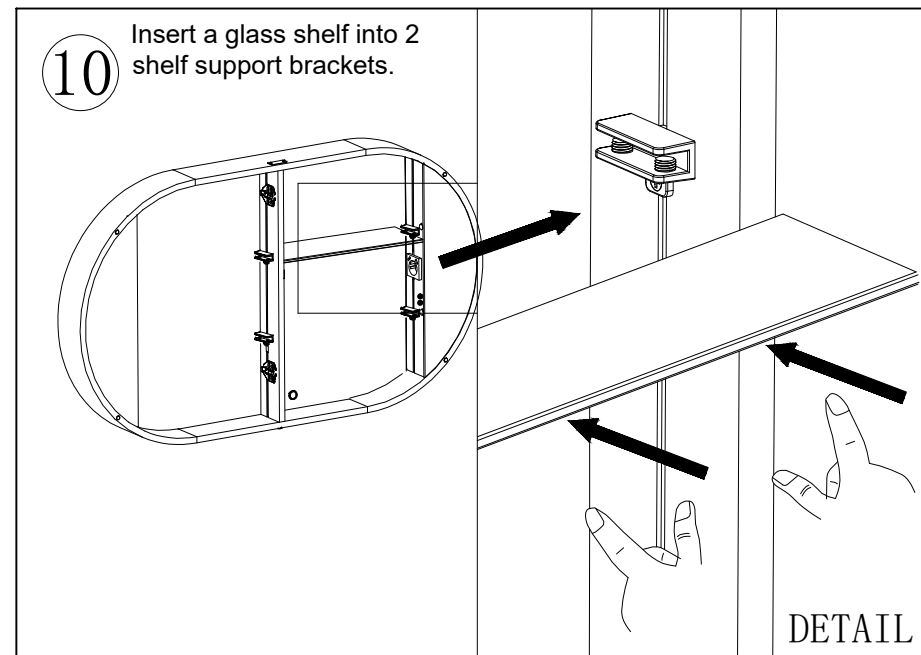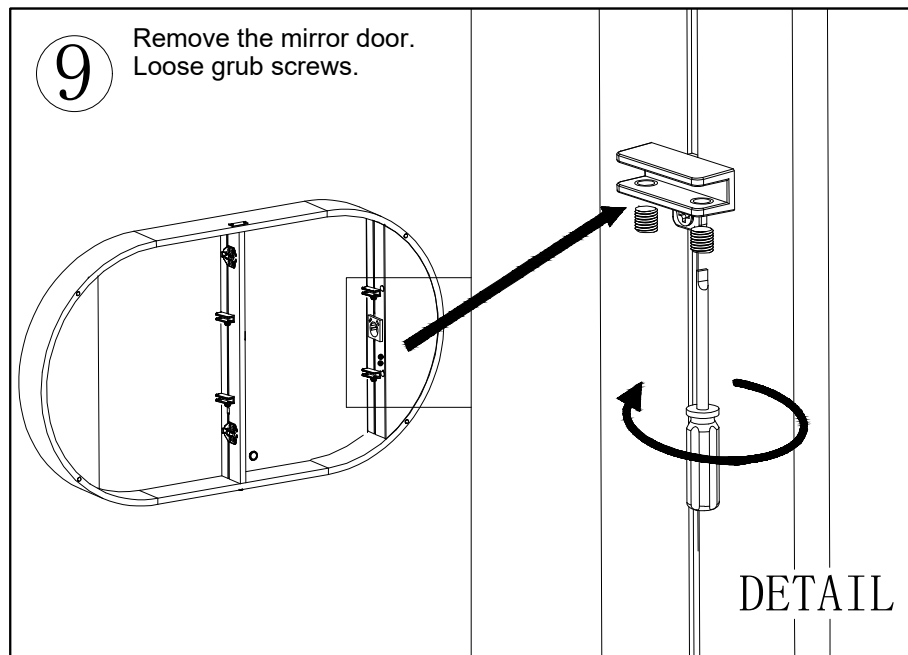


MAGNETIC STRIP INSTALLATION INSTRUCTION


- ① Tear the back adhesive film

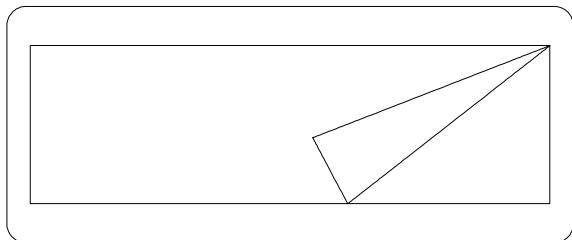


- ② Stick it on a suitable position

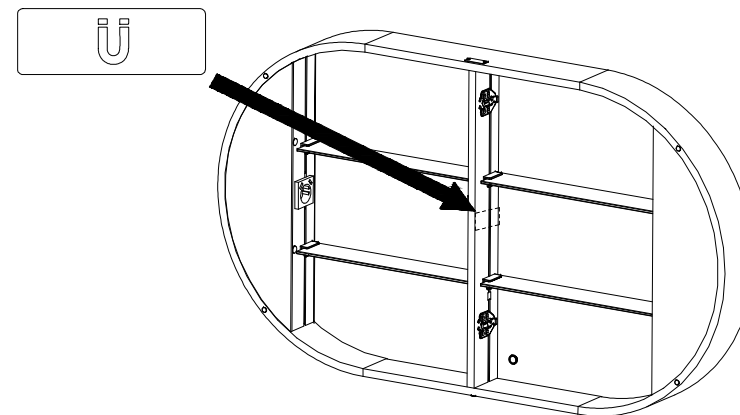


- ③ Press and hold after pasting

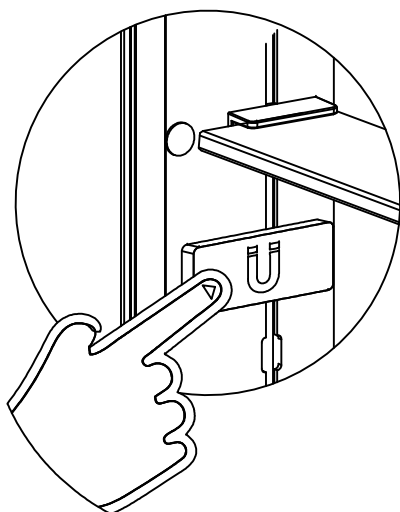


- ④ Put your accessories on the magnet

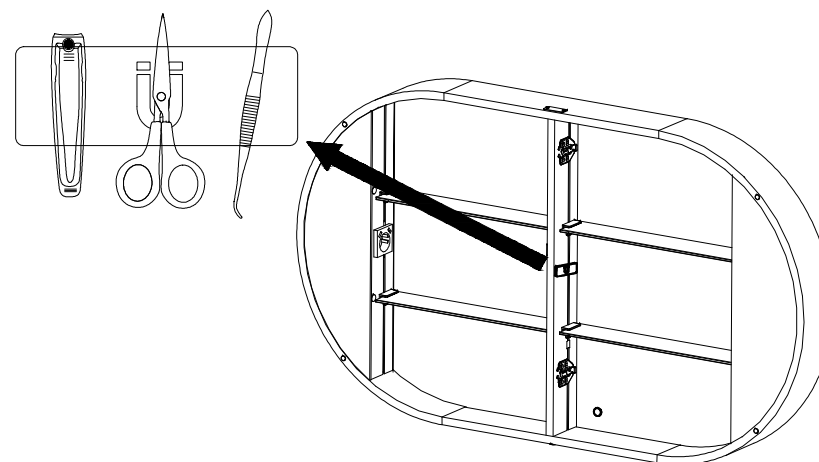

FIXING INSTRUCTIONS FOR THE MIRROR DOOR (STRONGLY ADVICE TO INSTALL EACH DOOR WITH 2 PERSONS)

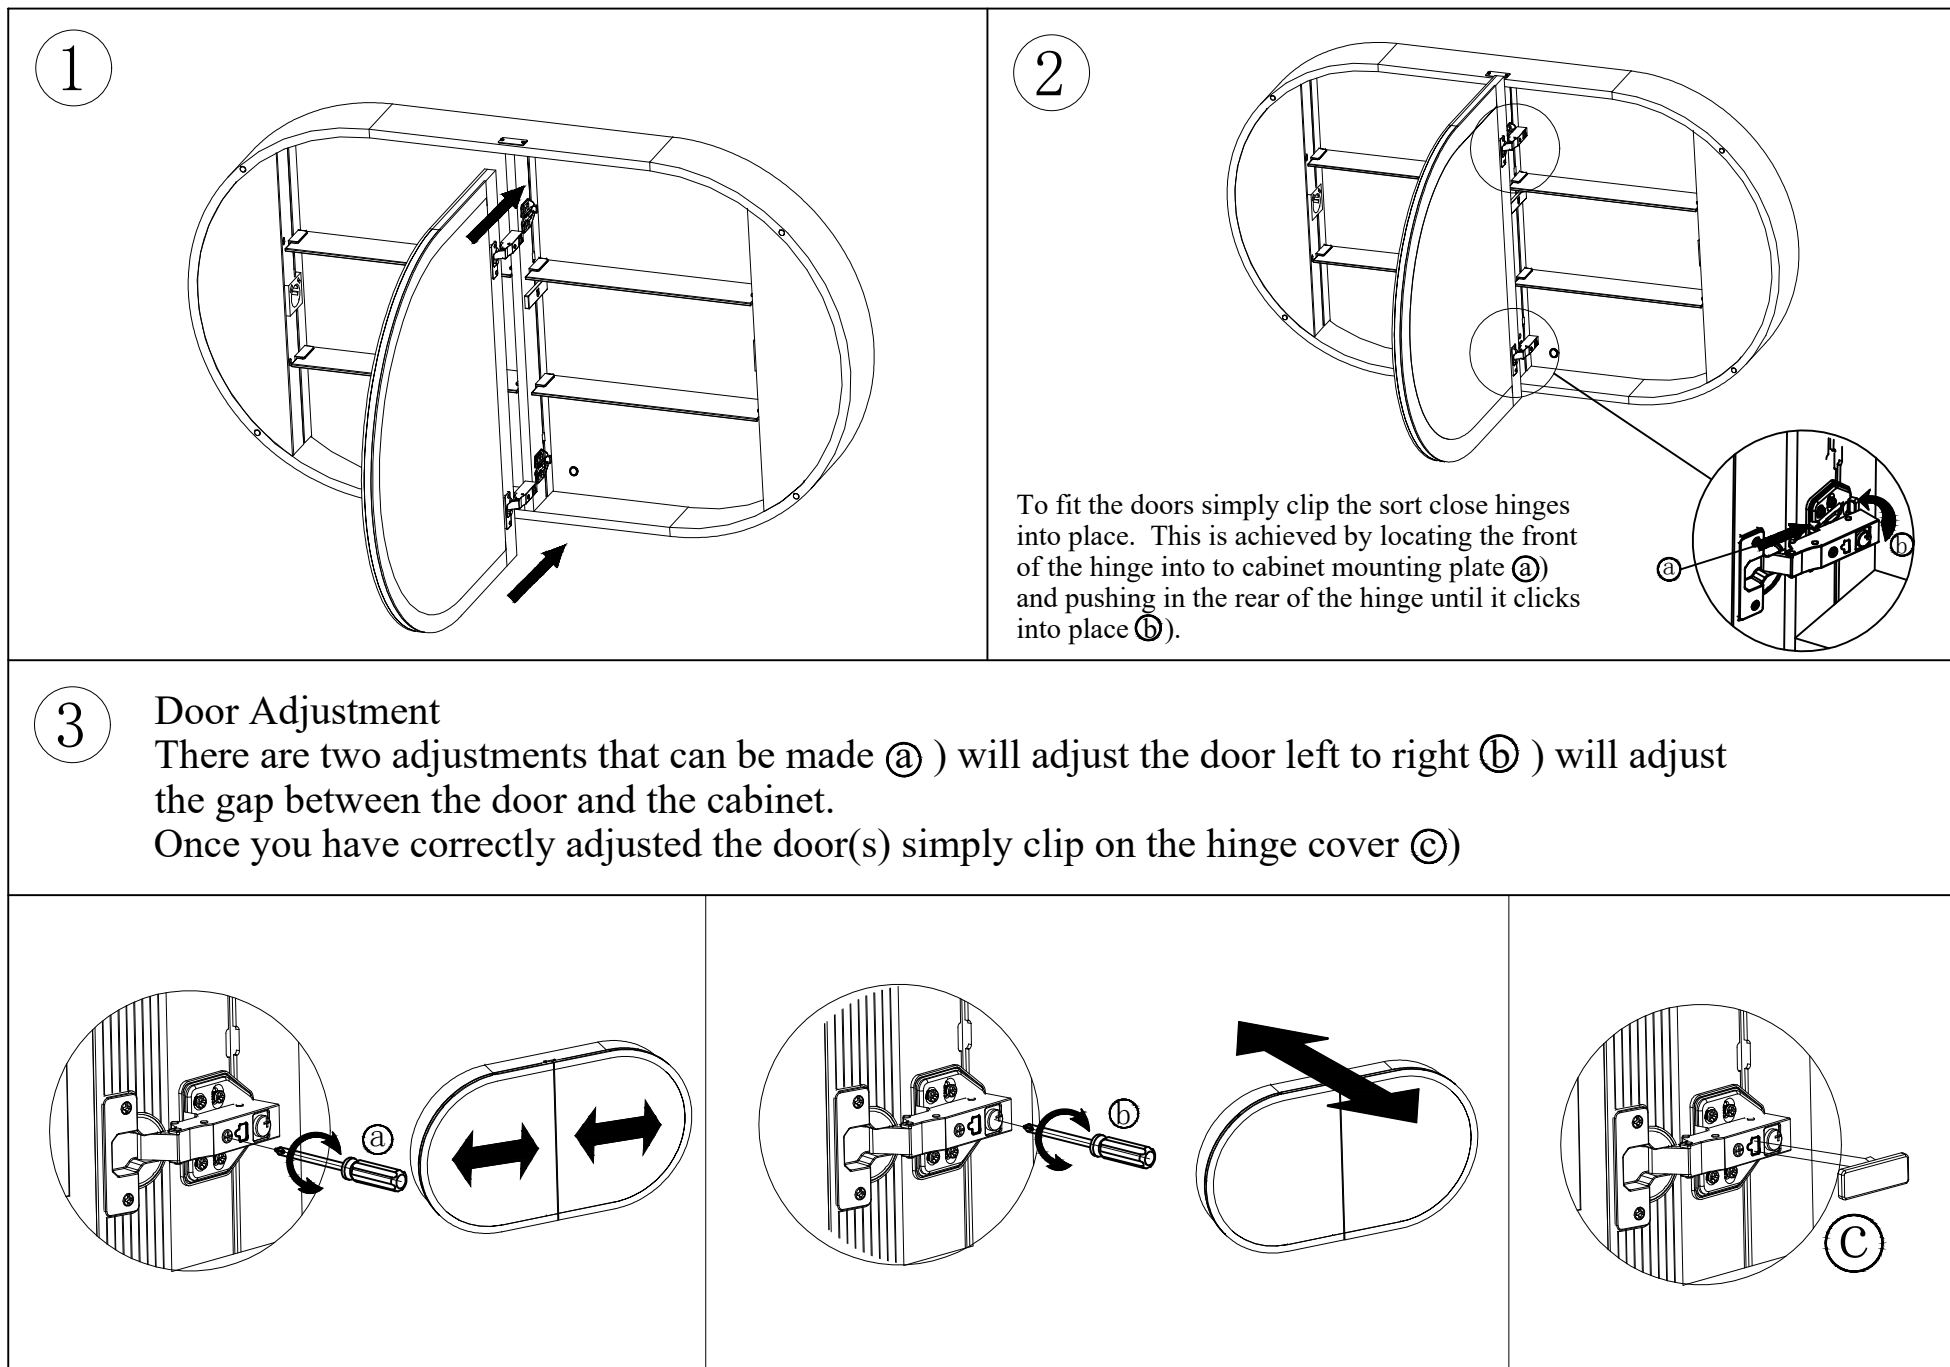


CAUTION: We recommend that you make sure the rear cable is not kinked or overlapped after installation to avoid potentially cracking the internal mirror.

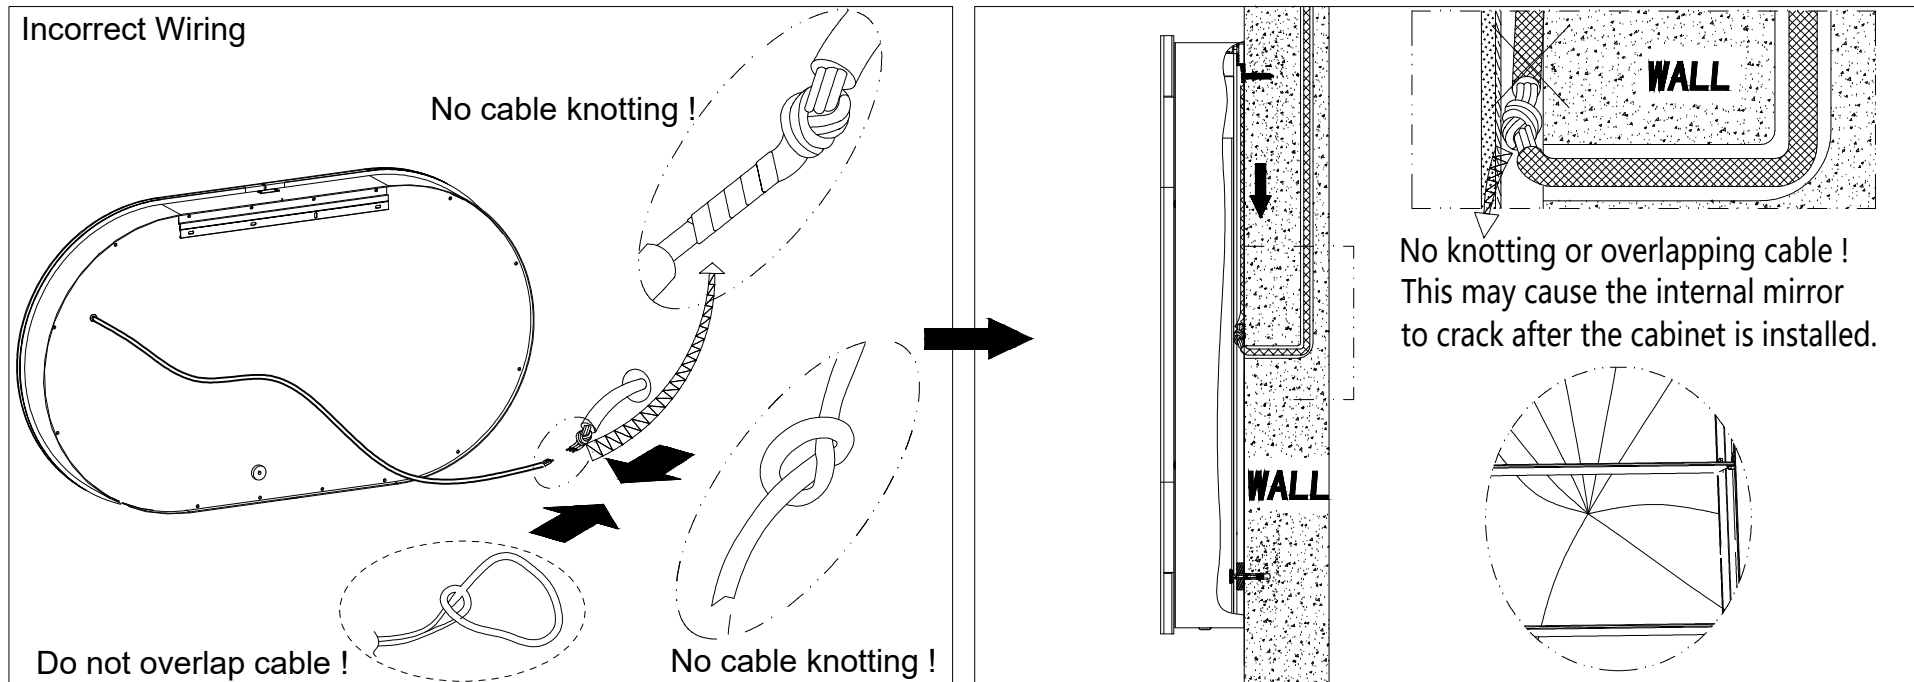




Please note that if you need to remove two mirror doors first to install the cabinet body/chassis, you must make sure to distinguish between the left and right doors when putting them back on.

The left door is the one with the built-in light ring and magnifying glass on the inside, while the right door does not have them. Please be careful not to switch them around.

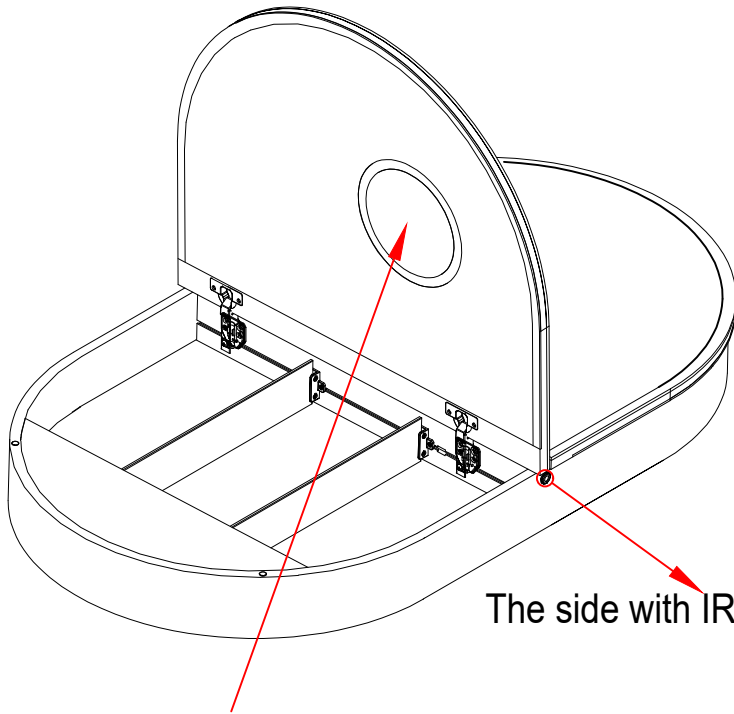

The side with IR sensor is the bottom.

The left door is the one with the built-in light ring and magnifying glass on the inside.

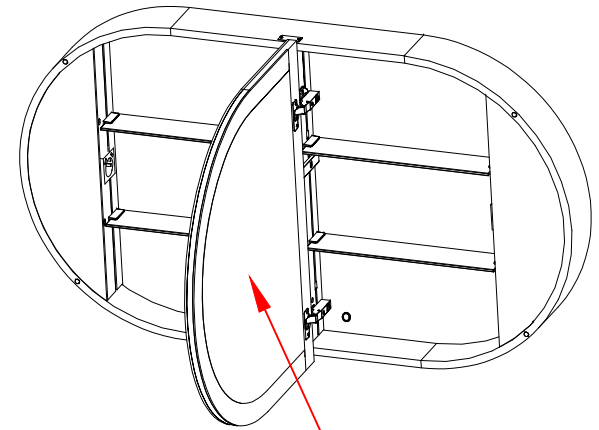

The right door does not have the light ring and magnifying glass on the inside.

IR Sensor & Two Touch Switches Operation Instructions:

1. Bottom IR Sensor: Sweep hand to turn light on/off.

2.  Dimming Switch:

(1) Short press to cycle through brightness levels (100%/75%/50%/25%/5%/25%/50%...).

(2) Long press to stepless dimming (from 100% to 5% within 3 seconds). The direction of dimming during a long press is always the opposite of the direction from the previous dimming operation.

3.  Adjusting Color Temperature Switch:

(1) Short press to cycle through three color temperatures (Cool Light → Neutral Light → Warm light).

(2) Long press to stepless adjusting color temperature (from Cool Light to Neutral Light to Warm Light within 3 seconds)

4. Demister Pad: The demister pad is automatically activated each time the light is turned on and deactivated when the light is turned off.

Friendly Reminder:

Please avoid placing your hand or any object over the bottom IR sensor for more than 10 seconds. Doing so will trigger a system restart of the mirror cabinet, during which the light cannot be turned on or off, and re-pairing is required.

If the system is actually triggered and requires a restart, here is the Solution:

(1) Please place your hand over the bottom IR sensor for 5 seconds. If the LED lights up, the system has restarted successfully.

(2) If the LED does not light up after step (1), sweep the IR sensor once (to confirm whether the mirror cabinet is in the light-off state), then repeat step (1).